



Wigry

Complete filter
for pond

Wigry

Pond filter

Telescopic outlet tube
smooth adjustment to the depth of the pond

Outlet adjustment within 30°
easy positioning of the device on uneven ground

T-piece
allows any distribution of the flow of water into a fountain and/or cascade*

Installation of the filter below the water surface

*Cascade and waterfall not included.



Fountain nozzle
effective oxygenation of water and a nice visual effect

Transport handle
also used to retract the cable when storing the filter

LED signaling
UV lamp operation

Power cord
with a length of 5 m

Wigry

Pond filter

Effective water purification in 4 stages:

1

Biological filtration

BioceraMax 600 biological media ensure biological balance

2

Mechanical filtration

The perforated housing retains large contaminants. The sponge cartridge retains smaller contaminants and protects biological media

3


Chemical filtration

ZeoMax Plus chemical cartridge removes heavy metals from water, toxins and phenols

4

Sterilization

Built-in UV sterilizer, prevents the growth of algae and pathogens

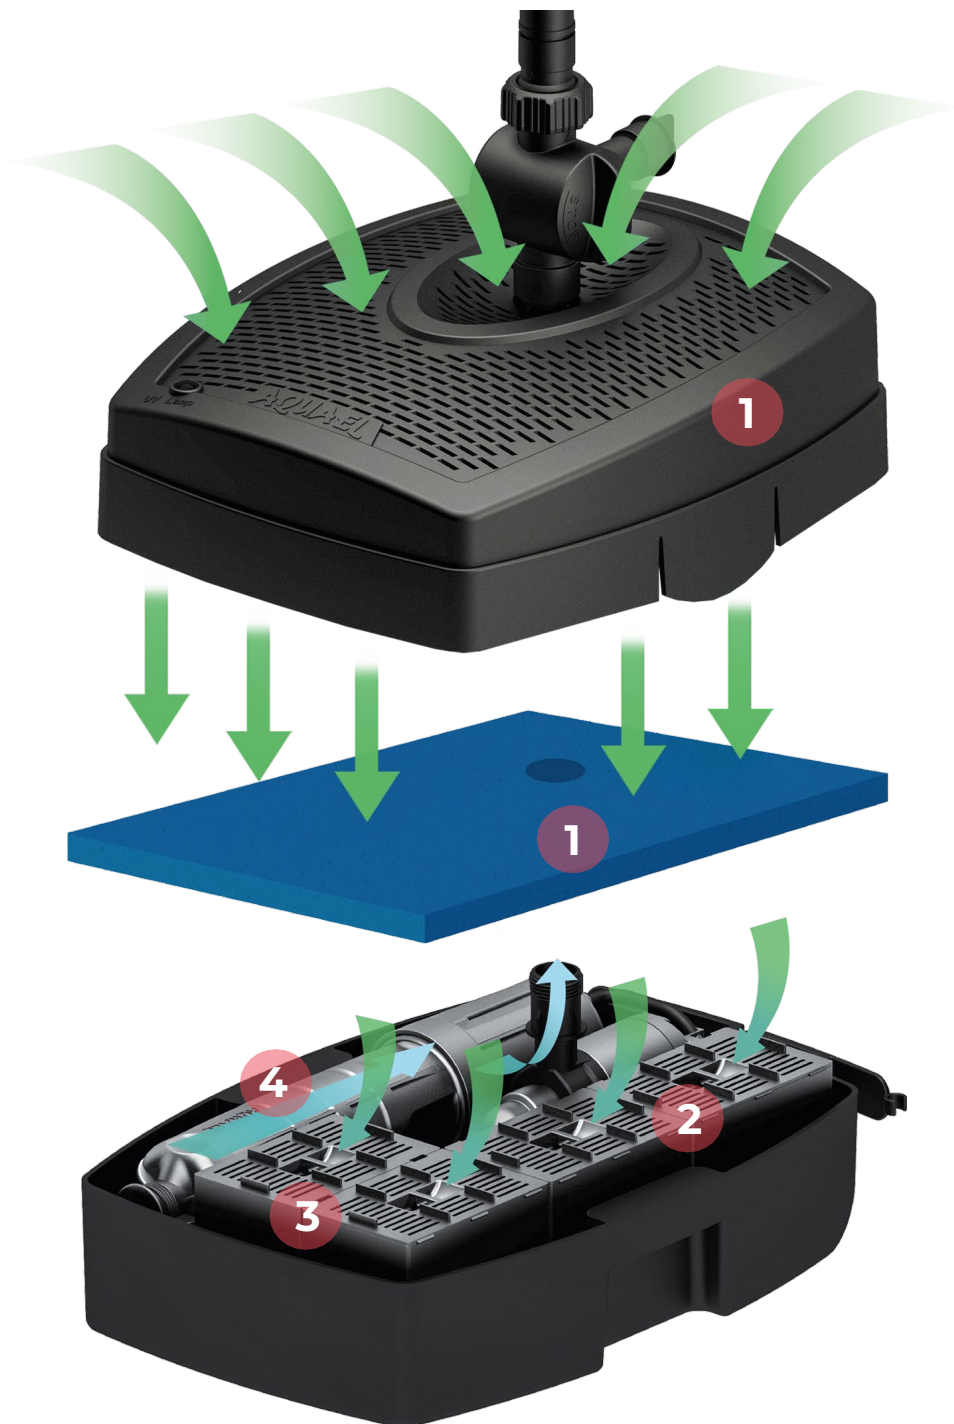

Wigry

Pond filter




	Wigry 2000	Wigry 4000	Wigry 6000
Pond velocity [l]	2000	4000	6000
Total unit power [W]	27	34	36
UV lamp wattage [W]	5	7	9
Protection degree [IP]	IPX8	IPX8	IPX8
Pump capacity [l/h]	1500	2000	2000
Hose diameter [mm/inch]	19 / 3/4"	19 / 3/4"	19 / 3/4"
Number of filter baskets	3	4	4
Installation inside the pond	Yes	Yes	Yes
UV filament lifetime	up to 10 000 hr.	up to 10 000 hr.	up to 10 000 hr.
Cable length [m]	5	5	5
Dimensions [L × W × H] [cm]: with the fountain nozzle retracted with fountain nozzle extended	34 × 26,8 × 48,5 39,2 × 26,8 × 48,5	39,2 × 26,8 × 48,5 34 × 26,8 × 62,8	39,2 × 26,8 × 62,8 39,2 × 26,8 × 62,8
Index	130516	130517	130519
Trade pack [pcs.]	51	51	51

AQUAEL

Visit our
webpage
and learn
more

learn more >>

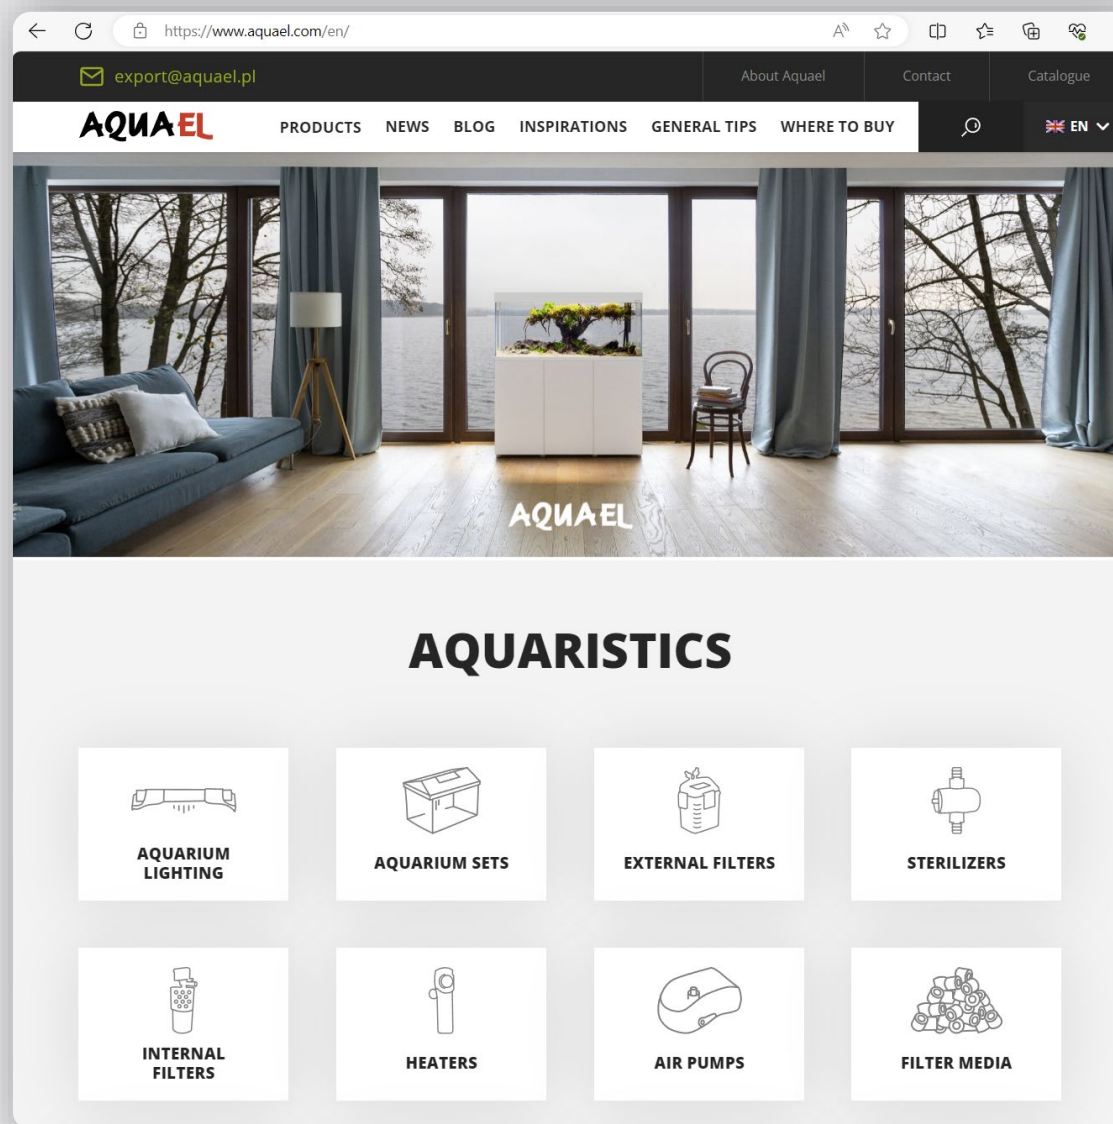

AQUAEL

AQUAEL sp. z o.o.
ul. Krasnowolska 50
02-849 Warsaw, Poland

+48 22 644 76 16
export@aquael.pl
www.aquael.pl